

DLA410

DLA series DLA410A


Line Array System




DLA410 is a compact, light weight, high SPL, 3-way line array speaker. It features low distortion mid-bass unit, mid-high coaxial driver with special waveguide and horn, accurate coverage, uniform changes, three-point hanging system, the whole system installation is fast, stable and safe. Unit configuration: 2x10" high efficiency neodymium mid-bass units, 1x1.4" exit throat 90mm voice coil neodymium MF driver and 44mm HF driver coaxial neodymium unit. The cabinet is made of multilayer composite plywood with wear-resistant polyurea paint. DLA410A is an active line array speaker with two channels digital amplifier with DSP.

DLA410是一款设计紧凑的三分音线性阵列音箱，具有体积小、重量轻，声压级大等特点，应用低失真中低音单元，中高音同轴驱动器配上专用波导管及号角。覆盖精确、变化均匀。三点吊挂系统安装快捷、稳定、安全。单元配置：2只10"钕磁高效率中低音单元，1只1.4"喉口90芯中音、44芯高音同轴钕磁驱动器；箱体采用多层复合夹板，耐磨聚脲喷涂。DLA410A是一款两通道D类带DSP的有源音箱。


CONFIGURATION



DLA410



DLA410A

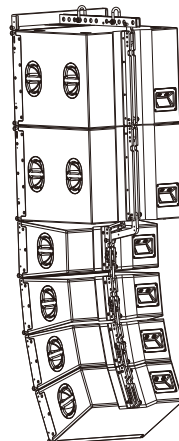

FEATURES

- Product parameters have been entered into EASE loudspeaker database
- Mid-high coaxial unit, real 3-way speaker, clear and powerful.
- Passive way, simple operation, save amplifiers
- Quick setup for hanging and stacking.
- Applications: theaters, concert halls, multifunction halls, lecture halls, auditoriums, stadiums, live houses, and touring

系统特征

- 产品参数已录入EASE扬声器数据库
- 中高音同轴驱动器：真正的三分频，清晰、明亮
- 内置分音：操作简单，节省功放及周边设备
- 多种组合使用方式：可吊挂、堆码，安装快捷、安全

适用范围

- 剧院、音乐厅、多功能厅、报告厅、礼堂、体育场馆
- 酒吧、LIVEHOUSE
- 流动演出



MODEL

FREQUENCY RESPONSE(-3dB)
FREQUENCY RESPONSE(-10dB)
DRIVERS

RATED POWER
SENSITIVITY
MAXIMUM SPL
IMPEDANCE
DISPERSION(-6dB)

CROSSOVER FREQUENCIES
INPUT CONNECTORS
PACKAGE SIZE
NET WEIGHT
GROSS WEIGHT

DLA410

60Hz-18kHz
55Hz-20kHz
2×10"(250mm)/3"voice coil LF
1×1.4"(36mm)/3.5"voice coil MF
1×1.4"(36mm)/1.7"voice coil HF
500W RMS,2000W peak
101dB 1watt/1meter
127dB continuous,133dB peak
8 ohms nominal
Horizontal: 90°
Vertical coverage: Varies,depending on array length and configuration
700Hz, 6KHz passive
2×Speakon NL4
537mm×400mm×720mm
26 kg/pc
30 kg/pc

DLA410A

60Hz-18kHz
55Hz-20kHz
2×10"(250mm)/3"voice coil LF
1×1.4"(36mm)/3.5"voice coil MF
1×1.4"(36mm)/1.7"voice coil HF
300W/8Ω+800W/8Ω
—
127dB continuous,135 dB peak
—
Horizontal: 90°
Vertical coverage: Varies,depending on array length and configuration
—
INPUT TYPE: Balanced Differential line
537mm×400mm×720mm
28 kg/pc
32 kg/pc